



PACE

ILLUMINATION

NIMBUS

HPAL PENDANT

STANDARD FEATURES

- Heavy gauge spun aluminum housing
- UV stabilized acrylic reflector
- All hardware stainless steel
- 5 year limited warranty
- Dimming driver(s) 0-10V
- Operating temperatures 40 degrees C/104 degrees F
- Buy American Act
- ETL listed and tested to UL Standard No. 1598 and CSA Listed for damp location indoor location



SERIES	MODEL	SIZE	STYLE	VOLT	LIGHT SOURCE	LUMENS	CCT	COLOR	MOUNTING	COMMON OPTIONS	SPECIFIC OPTIONS	
HPAL	500	812	DT: Dome Top RT: Round Top	120-277UNV 347-480UNV	2X PLT 32	3840		TAL: Textured Aluminum TBK: Textured Black TBZ: Textured Bronze TWH: Textured White	CBXX: Black Cord & Canopy, Specify Length CWXX: White Cord & Canopy, Specify Length ACXX: Aircraft Cable & Canopy, Specify Length SMXX: Stem & Canopy, Specify Length HHCP-BK: Hook Hanger, Black Cord & Plug HHCP-WH: Hook Hanger, Black Cord & Plug	CFL: Clear Flat Lens PCR: Polycarbonate Refractor RMB: Remote Mount Ballast EM: Emergency Back-up Power Supply DC: Dual Cable Suspension & Curly Cord (FT ONLY) OS: Occupancy Sensor**	EMI: Integral, Suspended Back-up Power Supply WG: Wire Guard SC30: 30 Degree Hang Straight SF: Single Fuse BT = Bluetooth sensor RD = Remote dimming PE = Photocell installed at factory MS = Motion sensor CC = Coil Cord	
					2X PLT 42	5120						
					35W*	4500	3500					
						4600	4000					
						4900	5000					
					4X PLT 32	7680						
		4X PLT 42			10240							
		816			35W	4500	3500					
						4600	4000					
						4900	5000					
					50W	5200	3500					
						5440	4000					
						5540	5000					
					70W*	8660	3500					
						9020	4000					
						9120	5000					
					8X PLT 32	15360						
					8X PLT 42*	20480						
					822	105W*	12990					3500
							13530					4000
							13680					5000
		140W*				17320	3500					
						18040	4000					
						18240	5000					
		245W*			30310	3500						
					31570	4000						
					31920	5000						
									* Active cooling US patent number 8,708,530 B2 / ** Available only on HPAL and HPGL models / *** Available only with PDR, DBR, KGD, KPD, and KDB			

* Active cooling US patent number 8,708,530 B2 /
 ** Available only on HPAL and HPGL models /
 *** Available only with PDR, DBR, KGD, KPD, and KDB

ORDERING INFORMATION

SERIES	MODEL	SIZE	STYLE	VOLT	LIGHT SOURCE	LUMENS	CCT	COLOR	MOUNTING	COMMON OPTIONS	SPECIFIC OPTIONS

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used. In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.



NIMBUS

HPAL PENDANT

SIZES


Small = 14.911 diameter
Medium = 18.7" diameter
Large = 24.811 diameter

MOUNTING

Air craft cable and cord standard

COLOR

Textured or smooth polyester powder coat finishes RAL colors available

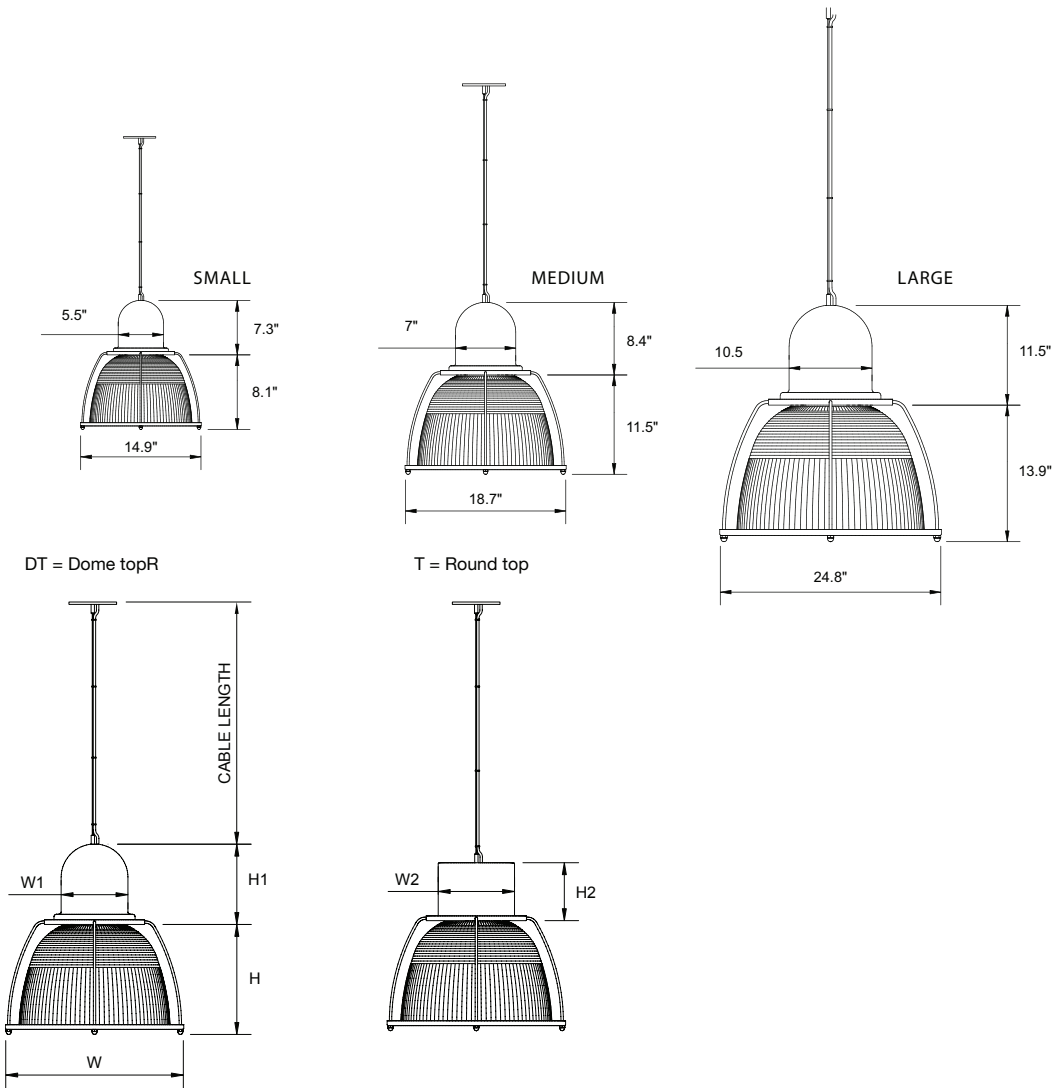

	W	W1	W2	W3	H	H1	H2	H3
Small	Ø14.9"	Ø5.5"	Ø6.0"	Ø6.0"	8.1"	7.3"	7.0"	2.0"
Medium	Ø18.7"	Ø7.0"	Ø8.0"	Ø8.0"	11.5"	8.4"	7.0"	2.0"
Large	Ø24.8"	Ø10.5"	Ø12.0"	Ø12.0"	13.9"	11.5"	8.0"	2.5"

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.