



URBANICA

UAPT 1 - post top

STANDARD FEATURES

- Two sizes - 18" and 24" diameter
- Die-cast aluminum arms and collar
- Die-cast aluminum globe fitter and four point "Twist and Lock" for ease of maintenance
- UV-stabilized acrylic or polycarbonate globe
- Type III and V glass refractor optics
- Many optical options available
- Matching wall sconce or wall arm mount available



Intertek



SERIES	MODEL	SIZE	LAMP	VOLT	LUMENS	CCT	CONTROL	COLOR	OPTIONS
UAPT-1 = POST TOP	4000	S = 18" L = 24"	30W/LED 50W/LED	120-277UNV 347-480UNV	4100	5000K	0-10V DIM	TEXTURED FINISHES TAL=TEXTURED ALUMINUM TBK= TEXTURED BLACK TBZ=TEXTURED BRONZE TWH=TEXTURED WHITE	HSS=HOUSE SIDE SHIELD^3 WMB1=WALL MOUNT BRACKET WMB2= WALL MOUNT BRACKET POLE ARM MOUNTS PAM=POLE ARM MOUNT PAM2/180=2 ARMS AT 180 PAM2/180=2 ARMS AT 180 PAM2/90=2 ARMS AT 90 PAM3C/180=2 ARMS AT 180 WITH CENTER HEAD PAM3/120= 3 ARMS AT 120 PAM4C/120=3 ARMS AT 120 WITH CENTER HEAD PAM4/90=4 ARMS AT 90 PAM5C/90=4 ARMS AT 90 WITH CENTER HEAD EM = Emergency Backup MS = Motion sensor BT = Bluetooth sensor RD = Remote dimming
					4000	4000K			
					3900	3000K			
					6530	5000K			
					6300	4000K			
					6075	3000K			

ORDERING INFORMATION

SERIES	MODEL	SIZE	LAMP	VOLT	LUMENS	CCT	CONTROL	COLOR	OPTIONS

^ Please indicate pole dimensions when ordering / ^^ APM mounts over 2 3/8" O.D. x 3" Tenon

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.



URBANICA

UAPT 1 - post top

SIZES

Small = 18" diameter

Large = 24" diameter


MOUNTING

Post top or wall arm bracket


COLOR

Textured or smooth polyester powder coat finishes


RAL colors available

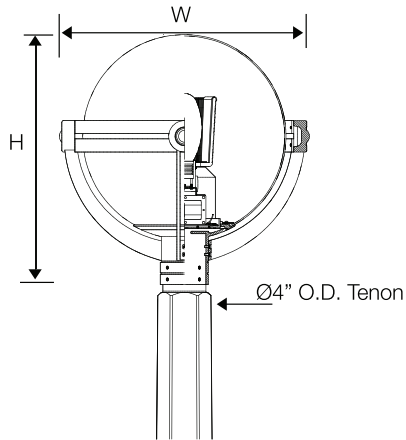


Wall mount bracket detail



WMB-1 = wall mount bracket



WMB-2 = wall mount bracket




SL = Stacked
Louver




HPL = High
performance louver




Glass refractor
Type III or V




Band Styles




WB = WIDE BAND



DB = DOUBLE BAND




SB = SINGLE BAND



PB = PERF BAND

Mounting Configurations

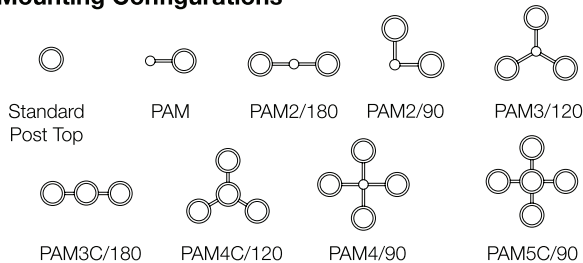

	W	H	A	B	EPA
Small	18.0"	19.0"	11.0"	18.0"	1.3
Large	24.0"	24.0"	13.0"	22.5"	1.95

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.